




A / TOP

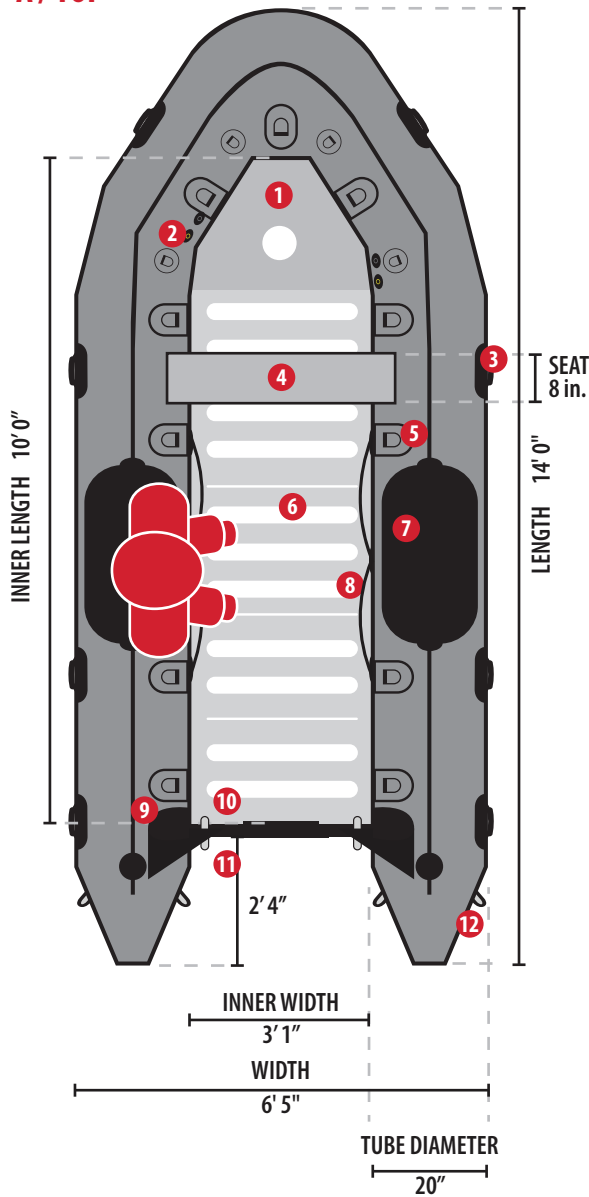

B / BACK

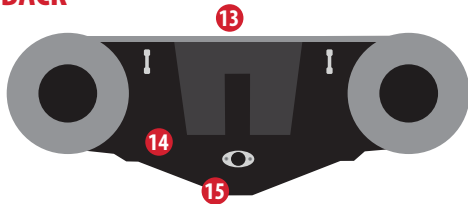

C / SIDE

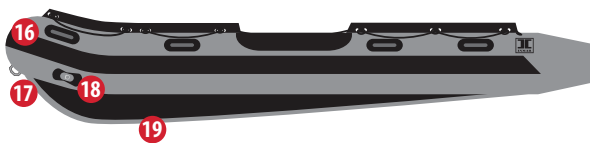


SPECIFICATIONS

Weight capacity: 8 persons / 2,395 lbs.
 Max HP: 40 HP / 225 lbs / Short shaft (15")
 Hull weight: 253 lbs.
 Air chambers: 5 + keel
 Fabric: Hypertex, polyester, 1.5 mm. dual coated material
 Factory warranty: 3 years recreational / 1 year commercial

SEC FEATURES

- 1.- A Aluminum floor with anodized aluminum stringers
- 2.- A Inflation and over inflation valves (One for each air chamber)
- 3.- A 8 carry handles, non slip design
- 4.- A 1 seat (1 positions)
- 5.- A 15 interior tie down D-rings (Stainless steel)
- 6.- A Non-skid traction covering on aluminum floor panels
- 7.- A Dive patch
- 8.- A Interior/Exterior lifelines (Peripheral)
- 9.- A Reinforcement on tube transom attachments
- 10.- A Interior transom lifting rings (Stainless steel)
- 11.- A Transom eyes
- 12.- A Two large D-rings on rear tubes (Stainless steel)
- 13.- B Interior aluminum engine mounting plate
- 14.- B Marine plywood transom
- 15.- B Standard self bailer with plug (Pop-up design)
- 16.- C All around rub strake, flat profile, black
- 17.- C Bow handle (Stainless)
- 18.- C Two large tow rings on bow (Stainless steel)
- 19.- C Rubbing strakes for beaching on keel

ACCESSORIES

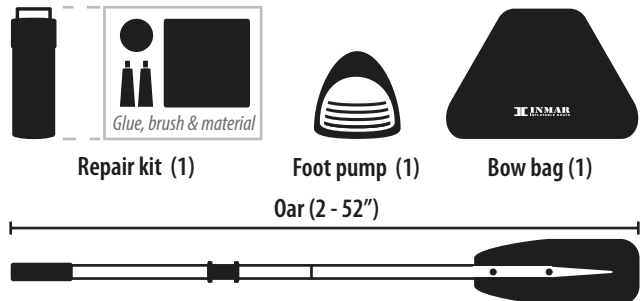

SHIPPING INFORMATION



BOAT

- Package dimensions: 54x28x18 (0.26 cbm.)
- Package weight: 202 lbs.




FLOOR

- Package dimensions: 45x29x13 (0.26 cbm.)
- Package weight: 158 lbs.

OPTIONAL EQUIPMENT:

- Quick-Fill field inflation system (SCUBA or SCBA)
- Scuppers set (High volume water drainage)
- Solas reflective panels (High night visibility)

ALUMINUM FLOOR

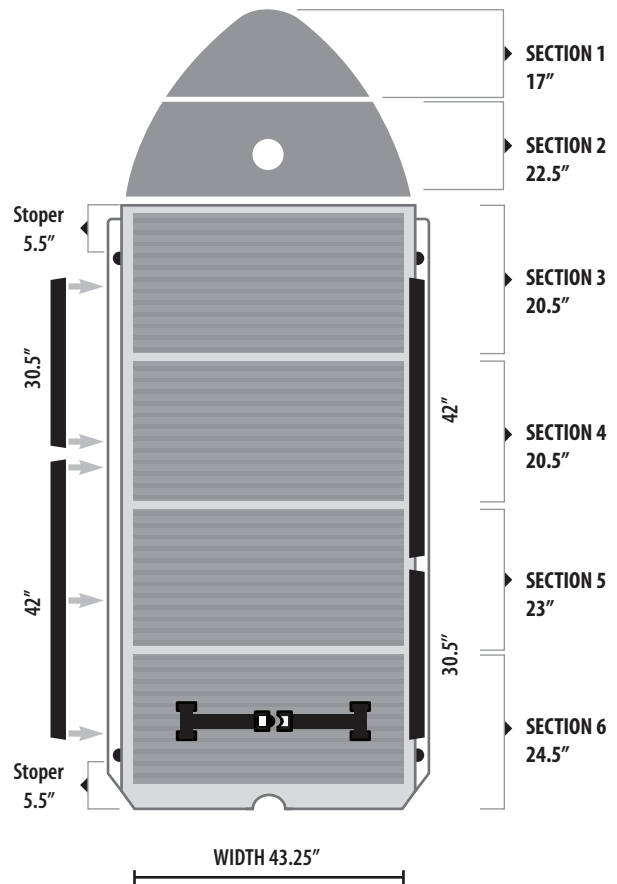

CORRECT LOCKED POSITION

- SECTIONS
- 1.- Stringers
 - 2.- Aluminum section

