


### **LAYOUT**




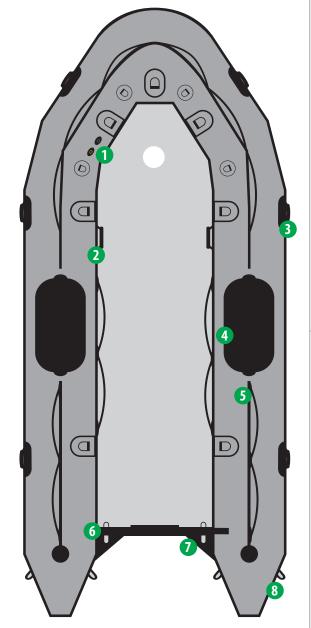

# **FEATURES**

- 1.- Inflation and over inflation valves (One for each air chaimber)
- 2.- Interior grab handles
- 3.- Exterior carry handles, non-slip design
- 4.- Dive patch
- 5.- Lifelines (Peripheral)
- 6.- Transom lifting rings (Stainless steel)
- 7.- Splash guard
- 8.- Two large D-rings on rear tubes (Stainless steel)
- 9.- Fiberglass transom
- 10.- Single point self-bailing system (high-flow scupper option)
- 11.- Performance tubes (Optional)
- 12.- Bow handle (Stainless)
- 13.- Two large tow rings on bow (Stainless steel)
- 14.- Keel rub strake
- 15.- All around rub strake, flat profile, black


# **REAR**

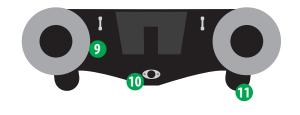

# SIDE





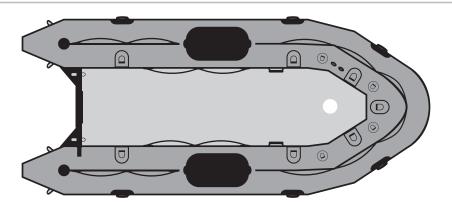

### **CAPACITY**

Passenger capacity:	6
Max payload:	1,750 lbs
Floorboard usable area:	22,2 ft <sup>2</sup>
Buoyancy tube volume:	36,4 ft <sup>3</sup>

# **FABRIC / SEAM CONSTRUCTIONS**

Mehler 1.2mm (1450 dtx) RF welded / temperature resistance -30  $^{\circ}$ C / +70  $^{\circ}$ C

#### **VALVES**

Inflation valves on main tube:	_ 4
Keel inflation valve:	_ 1
Overinflation valves:	_ 4

### REINFORCEMENTS

All around rub strake, flat profile, black:	1
Flat rub strake underneath keel, black:	1
Splash guard:	2

### HANDLING

Lateral carrying handles:	6
Exterior lifeline (peripheral):	3
Interior lifelines:	2
Interior large tie down D-Ring:	7
Bow bag D-Ring:	4

### **FACTORY WARRANTY**

3 years recreational / 1 year commercial

#### **TRANSOM**

Self-bailers	1
Aluminum engine mounting plate:	1
Transom sacrificial plate (Fiberglass)	1

# **ENGINE (aluminum floor)**

Recomended power (aluminum floor)	20 HP
Max power (aluminum floor):	30 HP
Shaft length:	15" short shaft
Max engine weight:	185 lb

#### **DIMENSIONS**

Overall lenght:	12′6″
Inner lenght:	8′7″
Overall width:	6′5″
Inner width:	3′1″
Tube diameter:	20"
Boat weight with floor:	185 lbs

#### **INFLATION**

High-pressure integrated floor system	1
Air chambers on main tube:	4
Inflatable keel:	1

### **TOWING AND LIFTING**

D-Rings:	Stainless steel
Bow carrying handle:	1
Rear large towing D-Ring:	2
Rear lifting points in transome:	2

# **OPTIONAL FEATURES**

Performance Tubes - For speed & stability	2
High-flow scuppers - Ouick drain system	2

# **SHIPPING INFORMATION**



#### **BOAT**

Package dimensions: 52x34x20Package weight: 230 lbs.



