


## LAYOUT



## MODEL COLORS

**MEHLER**  
WELDED SEAMS

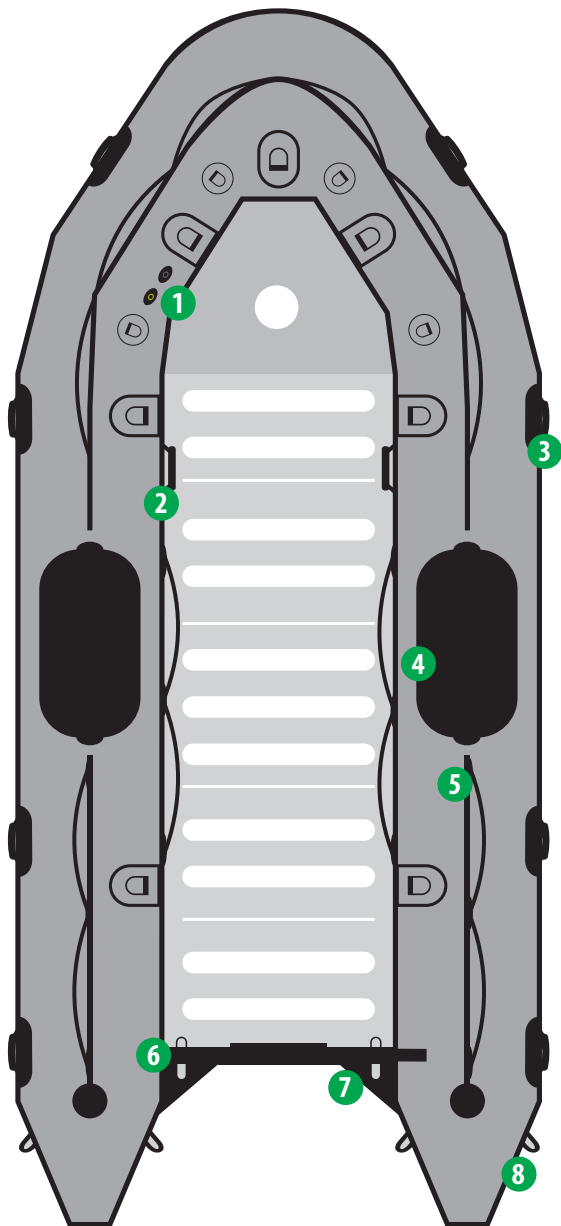

PATROL (PT)



MILITARY (MIL)



SEARCH & RESCUE (SR)

## FEATURES

- 1.- Inflation and over inflation valves (One for each air chamber)
- 2.- Interior grab handles
- 3.- Exterior carry handles, non-slip design
- 4.- Dive patch
- 5.- Lifelines (Peripheral)
- 6.- Transom lifting rings (Stainless steel)
- 7.- Splash guard
- 8.- Two large D-rings on rear tubes (Stainless steel)
- 9.- Fiberglass transom
- 10.- Single point self-bailing system (high-flow scupper option)
- 11.- Performance tubes (Optional)
- 12.- Bow handle (Stainless)
- 13.- Two large tow rings on bow (Stainless steel)
- 14.- Keel rub strake
- 15.- All around rub strake, flat profile, black


Last update: 9 - March - 2020

## REAR



## SIDE



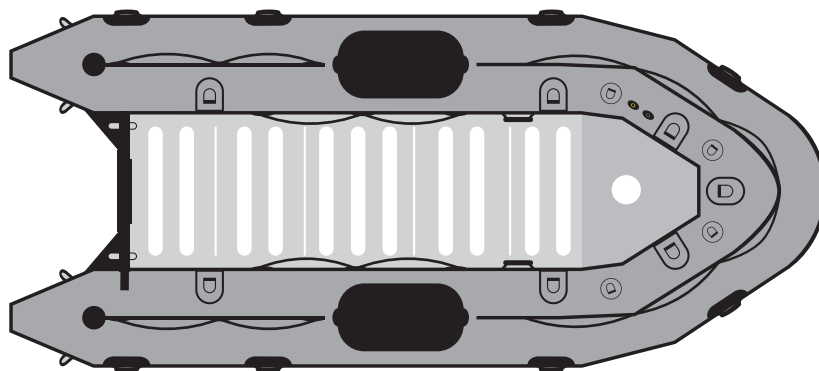

### CAPACITY

Passenger capacity:	10
Max payload:	2,750 lbs
Floorboard usable area:	31 ft <sup>2</sup>
Buoyancy tube volume:	65 ft <sup>3</sup>

### FABRIC / SEAM CONSTRUCTIONS

Mehler 1.2mm (1450 dtx)  
 RF welded / temperature resistance -30 °C / +70 °C

### VALVES

Inflation valves on main tube:	5
Keel inflation valve:	1
Overinflation valves:	5

### REINFORCEMENTS

All around rub strake, flat profile, black:	1
Flat rub strake underneath keel, black:	1
Splash guard:	2

### HANDLING

Lateral carrying handles:	8
Bow carrying handle:	1
Exterior lifeline (peripheral):	3
Interior lifelines:	2
Interior large tie down D-Ring:	7
Bow bag D-Ring:	4

### FACTORY WARRANTY

3 years recreational / 2 year commercial

### TRANSOM

Self-bailers	1
Aluminum engine mounting plate:	1
Transom sacrificial plate (Fiberglass)	1

### ENGINE (aluminum floor)

Recommended power (aluminum floor)	40 HP
Max power (aluminum floor):	50 HP
Shaft length:	20" long shaft
Max engine weight:	250 lb

### DIMENSIONS

Overall length:	15' 6"
Inner length:	11' 0"
Overall width:	6' 5"
Inner width:	3' 1"
Tube diameter:	20"
Boat weight with floor:	298 lbs

### INFLATION

Air chambers on main tube:	5
Inflatable keel:	1

### TOWING AND LIFTING

D-Rings:	Stainless steel
Bow large towing D-Ring:	2
Rear large towing D-Ring:	2
Rear lifting points in transome:	2

### OPTIONAL FEATURES

Performance Tubes - For speed & stability	2
High-flow scuppers - Quick drain system	2

### SHIPPING INFORMATION



#### BOAT


- Package dimensions: 56x30x20
- Package weight: 250 lbs.



#### FLOOR

- Floor dimensions: 46x32x10
- Floor package weight: 134 lbs.

## FLOOR OPTIONS

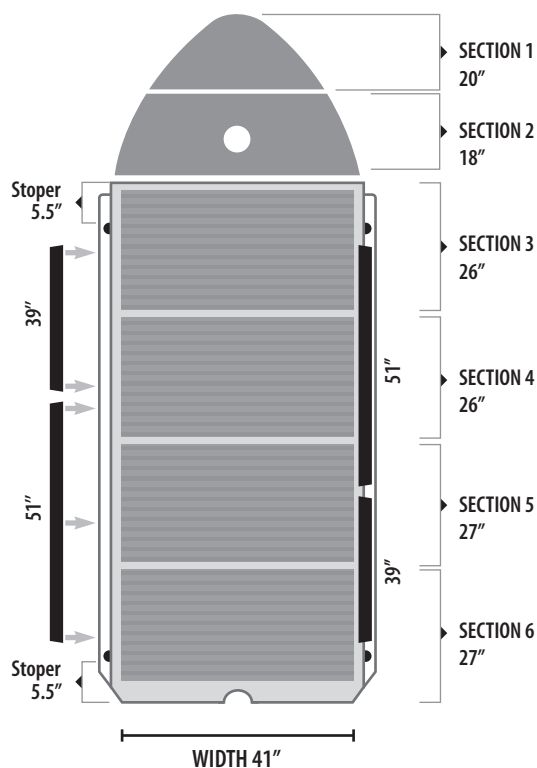

### ALUMINUM FLOOR

24 mm profile gauge  
5086 marine grade-treated  
Non skid EVA traction

Front floor boards (Fiberglass)	2
Aluminum sectional flooring	4
Side locking rails	4

*\*Floor must be removed prior to roll-up storage*

## OPTIONAL EQUIPMENT



Quick inflation system



SCBA Adaptor



High flow scuppers



Bow bag



6 gl fuel bladder

1



*\*Optional reflective panel*

2



3



*\*Aluminum floor shown*


4




5



6

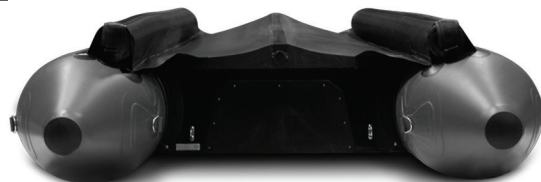

7

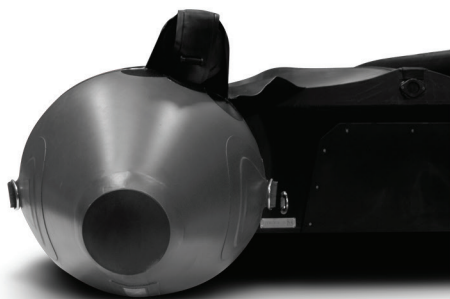

*\*Optional performance tubes*

8

