

INFLATABLE BOATS

SPECIFICATIONS // 530-(SR/PT/MIL)-HYP





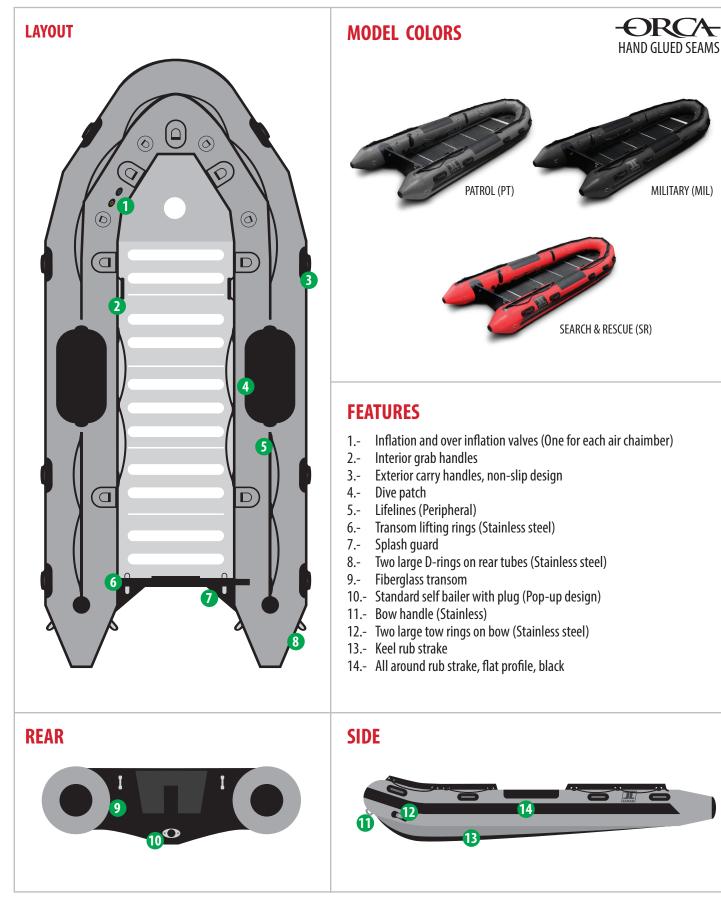

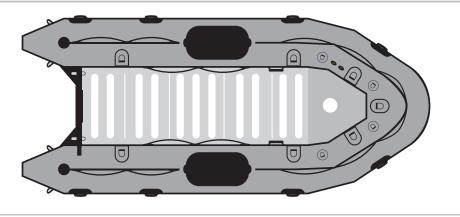

CAPACITY

| Passenger capacity: | 12 |
|-------------------------|--------------------|
| Max payload: | 2,985 lbs. |
| Floorboard usable area: | 31 ft ² |
| Buoyancy tube volume: | 65 ft ³ |

FABRIC / SEAM CONSTRUCTIONS

Hypalon (CSM), Orca 866 (military grade), 1670 dtex

VALVES

| Inflation valves on main tube: | 5 |
|--------------------------------|---|
| Keel inflation valve: | 1 |
| Overinflation valves: | 5 |

REINFORCEMENTS

| All around rub strake, flat profile, black: | 1 |
|---|---|
| Flat rub strake underneath keel, black: | 1 |
| Splash guard: | 2 |

HANDLING

| Lateral carrying handles: | |
|---------------------------------|---|
| Bow carrying handle: | 1 |
| Exterior lifeline (peripheral): | 3 |
| Interior lifelines: | 2 |
| Interior large tie down D-Ring: | 7 |
| Bow bag D-Ring: | 4 |

FACTORY WARRANTY

3 years recreational / 2 years commercial/government

TRANSOM

| Self-bailers | 1 |
|--|---|
| Aluminum engine mounting plate: | 1 |
| Transom sacrificial plate (Fiberglass) | 1 |

ENGINE (aluminum floor)

| Recomended power (aluminum floor) | 40 HP |
|-----------------------------------|----------------|
| Max power (aluminum floor): | 60 HP |
| Shaft length: | 20″ long shaft |
| Max engine weight: | 250 lb |

DIMENSIONS

| Overall lenght: | 17'8″ |
|-------------------------|---------|
| Inner lenght: | 13′6″ |
| Overall width: | 7′ 2″ |
| Inner width: | 3′3″ |
| Tube diameter: | 22″ |
| Boat weight with floor: | 340 lbs |

INFLATION

| Air chambers on main tube: | 5 |
|----------------------------|---|
| Inflatable keel: | 1 |

TOWING AND LIFTING

| D-Rings: | Stainless steel |
|----------------------------------|-----------------|
| Bow large towing D-Ring: | 2 |
| Rear large towing D-Ring: | 2 |
| Rear lifting points in transome: | 2 |

OPTIONAL FEATURES

| Performance Tubes - For speed & stability | 2 |
|---|---|
| High-flow scuppers - Quick drain system | 2 |

SHIPPING INFORMATION





Package dimensions: 58X30X20
Package weight: 285 lbs.

Floor dimensions: 52X30X16
Floor package weight: 215 lbs.




SPECIFICATIONS // 530-(SR/PT/MIL)-HYP

FLOOR OPTIONS

ALUMINUM FLOOR

24 mm profile gauge 5086 marine grade-treated Non skid EVA traction

| Front floor boards (Fiberglass) | 2 |
|---------------------------------|---|
| Aluminum sectional flooring | 5 |
| Side locking rails | 6 |

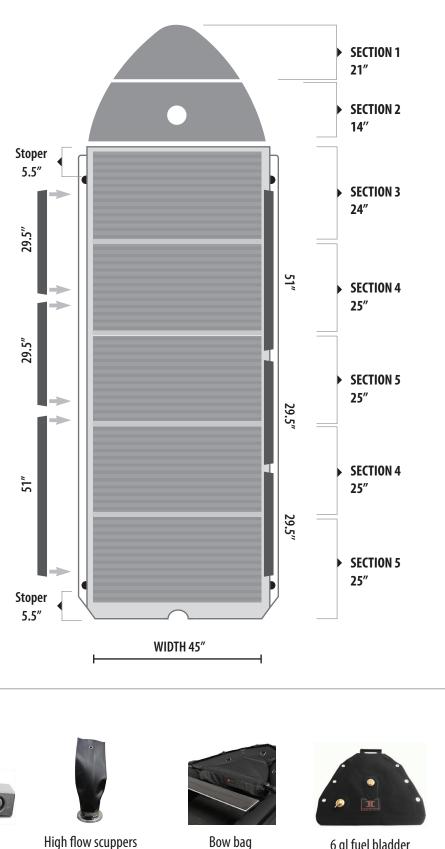

Quick inflation system

*Floor must be removed prior to roll-up storage

OPTIONAL EQUIPMENT

High flow scuppers

SCBA Adaptor

6 gl fuel bladder



SPECIFICATIONS // 530-(SR/PT/MIL)-HYP

